


Endoscopes and instruments for minimally invasive surgery



Video-Laparoscope

for small animals

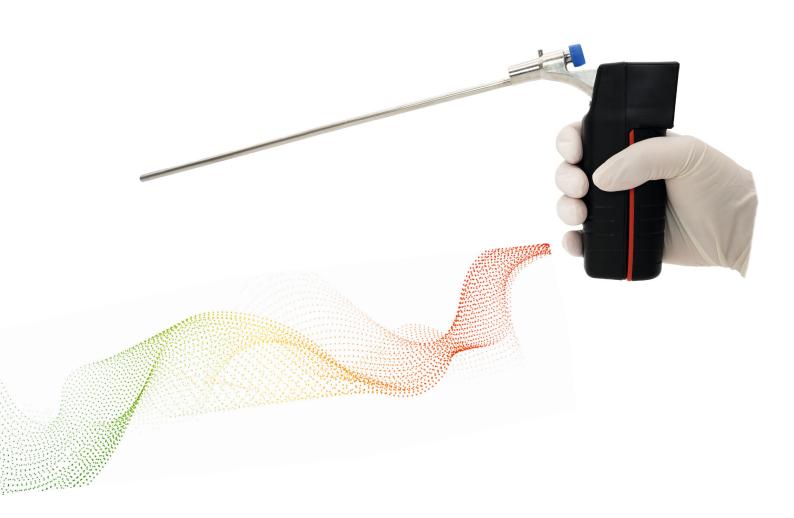



Telescopes for diagnostic and surgery

Video Laparoscope, wireless




TV27-5SET

Video Laparoscope/ Vaginoscope 0°, OD: 5mm, WL: 27cm, cordless generation with exchangeable battery, with LED light, 5,8 Ghz

Consisting of:

- Compact Vaginoscope/Laparoscope (TA27-5)
- Charging station (TVG-4)
- 2x battery (TVG-36)
- Outer sheath 12mm (STV27-51) working channel: 5,6mm, WL: 27cm
- Vaginoscope sheath (STV27-5V)
- Small air pump (H150-1-1)
- Power adapter (TV27-NET)
- 10" Receiver monitor (TXM10-58R)





LED light







Trocar cannulas with magnetic valve, safety trocars

Trocar cannulas are designed with different types of valves to reduce or to avoid CO2 loss when changing instruments and telescope during laparoscopy and thoracoscopy. Our reusable and patented magnetic valve trocar system has several advantages compared to other valve types. First of all they are light in weight and because of the valve construction, the insertion of instruments and scopes will pass smoothly through with out scratching or touching the front lens like in a ball system or in a so called automatic valve system. In addition there is nearly no gas loss even when changing instruments. There are no mechanical parts to clean inside except the magnetic flap itself which is a great help to your staff.

Inner diameter 5,5mm

for standard 5mm instruments

231-213V Cannula only with magnetic valve, ID: 5,5 mm,

7 cm, stainless steel, stopcock, 40 g

Cannula only with magnetic valve, ID: 5,5 mm, 231-212V

7 cm, 30 g (without picture)

Safety trocar only "Cavi Safe" 231-137V

cork screw handles, compatible with cannulas

ID: 5,5 mm, WL: 7 cm, fully dismantable

231-105V Trocar only with sharp tip, compatible with

Canully only ID: 5,5 mm, WL: 7 cm (without picture)







Tissue pressure exposes the sharp tip

Inner diameter 10mm

for telescopes and 10,, instruments

Cannula only with magnetic valve, 230-212V

ID:10 mm,WL: 7 cm, inflation stopcock, 55 g

Cannula only with magnetic valve, 230-213V

ID: 10 mm, WL: 7 cm, 45 g, (without picture)

230-137V Saftey trocar only with cork screw handles,

compatible to cannulas ID: 10 mm, WL: 7 cm,

fully dismantable

230-105V Trocar only with pyramidal tip for cannulas

ID: 10 mm, NL: 7 cm

Inner diameter 13mm

for telescopes and 13mm instruments

637-232 Cannula only with magnetic valve,

ID:13 mm, WL: 10 cm, inflation stopcock, Trinox

Canulla only with pyramidal tip for cannulas 237-173

ID: 13 mm, WL: 10 cm





237-173





Accessoriers, Trocar disposable



Canula only Magnetic valve flap Sealing caps					
231-211 Sealing caps for Ø 5,5mm, blue Package of 10 pieces	631-901 Magnetic valve body, Ø 5mm With Magnetic Head-/valve flap & sealing caps				
234-211 Sealing caps for Ø 8mm, white Package of 10 pieces	634-901 Magnetic valve body, Ø 8mm With Magnetic Head-/valve flap & sealing caps				
230-211 Sealing caps for Ø 10mm, red Package of 10 pieces	630-901 Magnetic valve body, Ø 10mm With Magnetic Head-/valve flap & sealing caps				
231-215 Magnetic valve flap for Ø 5,5mm cannulas Package of 2 pieces	630-902 Spare stopcock Complete with spring nut				
230-215 Magnetic valve flap for Ø 8/10/11/12/13 mm cannulas Package of 2 pieces	630-903 Spare spring nut				
236-217 Sealing ring for Trinox trocar cannulas for Ø 3,5mm & 5,5mm Package of 5 pieces	230-217 Sealing ring for Trinox trocar cannulas for Ø 8, 10, 11, 12, 13mm Package of 5 pieces				
230-505 Snap reducer for cannulas from Ø 10mm to 5,5mm	237-510 Snap reducer for cannulas from Ø 13mm to 10mm				

Trocar disposable 5,5mm & 12,5mm



TR-59-54 Trocar disposable, ID: 5,5mm, WL: 7 cm,

with spike, LL(f), inflation stopcock,

package of 8 pieces

TR-60-121 Trocar disposable, ID: 12,5mm, WL: 10cm,

with optical spike, no blade,

12-8/-5 mm, LL(f) inflation stopcock,

package of 6 pieces

41 2025





Palpation and Puncture

Laparoscopy first puncture needle

L-19-100 Veress needle OD: 2,1 mm, 10 cm, LL(f)





Injection cannula

Injection system and probe

L-210 Injection cannula

thin, 1x26 mm, 2 pieces

L-218 Injection cannula

large, 1,9x26 mm, 2 pieces

L-218R Injection cannula

rounded, 1,9x28 mm, 2 pieces

L-33-210 Injection system and probe

5 mm, 33 cm, protected interchangable needle,

consisting of:

Inside tube, LL, connector L-33

L-33-2 Outer tube/probe

L-210 Needle, 1 piece (1x26mm)

Mini instrument for two portal technique in laparosopy, 2,4mm

L-24-23 Needle with mini grasping forceps

OD: 2,4 mm, WL: 23 cm





42 2025



Standard instruments, 5mm

We are currently optimizing our 5 mm instruments for you. Individual components may be available upon request — feel free to contact us!

Plastic handles

- With or without lock
- HF connector
- Colour coding for scissors


H 01/H 05



- Long life span
- **Compatible to 5mm** trocar cannulas

Tubular sheaths

- 5 mm Ø
- Different working lengths
- Rotatable through 360° oder feststehend
- Insulated



Complete instruments, fully dismantable

Scissors

Hook scissors, 5mm, 33cm, single action 531.04H05V

jaws, insulated, rotatable, dismantable, high quality,

consisting of:

jaws insert (53M04), sheath (53 R 1) handle (H05), color code:white



Biopsy forceps

531.61H01V Biopsy forceps, 5mm, 33cm,

double action jaws, dismantable,

consisting of:

jaws insert (53M60), sheath (53R1) handle (H01), color code:black





43 2025



Standard instruments, 5mm

We are currently optimizing our 5 mm instruments for you. Individual components may be available upon request — feel free to contact us!

Universal dissection forceps

531.40H01V

Dissection forceps (Maryland) Ø 5 mm, WL: 33 cm

curved, insulated, rotatable, dismantable, consitsting of:

jaws insert (53M40), sheath (53R1) handle (H01) colour code: black



Dissecting forceps, strong Ø 5mm, WL: 33cm

curved, for use with 8 & 10mm trocars consitsting of: jaws insert (53M37), sheath (53R1) handle (H01) colour code: black



531.22H01V

Grasping forceps, universal Ø 5 mm, WL: 33 cm

insulated, rotatable, zerlegbar, dismantable consitsting of:

jaws insert (53M22), sheath (53R1) handle (H01) colour code: black



Bowel grasping forceps Ø 5 mm, WL: 33 cm

insulated, rotatable, zerlegbar, dismantable consitsting of:

jaws insert (53M36), sheath (53R1) handle (H01) colour code: black



Grasping forceps insert Ø 5 mm, WL: 33 cm

front hooks consitsting of: jaws insert (53M24), sheath (53R1) handle (H01) colour code: black



Atraumatic grasper Taccun, Ø 5 mm, WL: 33 cm

insulated, rotatable, zerlegbar, dismantable consitsting of:

jaws insert (53M25), sheath (53R1) handle (H01) colour code: black



DeBakey grasping forceps Ø 5mm, WL: 33cm

consitsting of:

jaws insert (53M35), sheath (53R1) handle (H01) colour code: black





Palpation

Knot tier and cutter



Easy handling, easy to tighten, additional cutting

L-19-534

Knot tier, standard version, OD: 5 mm, WL: 29 cm, easy filling, suture size up to 1metric

Needle holders

Axial handle, ergonomic, stable, O D: 5mm

- Easy Clean System
- Needle self positioning





L-19-561

Needle holder, straight Ø 5mm, WL:22cm, axial handle LL cleaning connector



L-19-563

Needle holder, angled upwards Ø 5mm, WL: 22cm, axial handle LL cleaning connector





Special devices - High Frequency Surgery

High frequency unit, High speed, Typ Atom

High frequency unit, High speed - with vessel sealing technique. Parallel usage of all outputs.

- Adapter for instruments other manufacturers on request
- uncomplicated use
- up to date safety regulation
- vessel sealing with confirmation signal
- compatible to all instruments on the market
- program via Touch Screen
- SDS self detecting system



HF-401-TH HF/Radio frequency unit, High End Thermo Stapling (vessel sealing), touch-screen programmable, latest mono & bipolar technique SDS - self detecting system incl. high speed vessel sealing delivery without accessories, 400W, 230VAC, 50/60Hz

S		_	_	:Ι:		_	ı:	_		_	
$\overline{}$	n	$\boldsymbol{\omega}$	C	ITI	ľ	a	ΤI	n	n	c	•

opecifications.		
Monopolar	Cutting Coagulation Soft/Forced	400 W 200 W + / +
Bipolar	Cutting Coagulation Auto Start/Stop	400 W 200 W + / +
Bipolar	Thermo-Stapling Thermo sealing Auto Stop	+ 300 W + +
Weight	7 kg	
max. power		420 W



Special devices - Inflator

CO₃Inflator, electronically monitored

- small and large animal
- reusable tubing
- bacterial filter
- economical



741-025V

CO₂ Inflator, electronically monitored, max. 20 litre, complete without bottle automatic pressure reduction system, DIN gas connection type, 115-230 VAC, 50-60Hz, DIN IEC 601/1, DIN VDE 871

Accessories





741-009-1 Spare Silicon tube, 3m, for CO, inflation,

incl. connector, autoclavable

741-009-FF Sterile filter system for CO₂ -inflator

disposable, box with 50 pcs. medical connection D:22mm

741-002 CO, high pressure tube, 1m

DIN connector, screw both sides

741-009V-PN CO, high pressure tube, 0,8m

compatible to PIN Index bottle (without picture)

Sterile product return shipment not accepted





Complete set with video laparoscope - wireless

Basic set without camera system and light source

SET-K-LA-B1

Laparoscopy set, small animals, conventional for stndard 2 portal technique complete, but without video camera and light source

consisting of:

- Wide angle telescope 30°/5mm/28cm (T281-5030)
- Safety trocar complete, 5,5mm (231-213V & 231-137V)
- Safety trocar complete, 10mm (230-212V & 230-137V)
- Trocar reducer 10/5 (230-505)
- Veress needle, 10cm (L-19-100)
- Grasping forceps, 5mm
- Metzenbaum scissors, 5mm
- Preparation forceps, 5mm
- CO2 Inflator, electronically monitored 20l (741-025V)



Option:

SET-K-LA-B2

same as SET-K-LA/VA1 + HF vessel sealing, type Atom incl. sealing MIC instrument 5mm

Complete set with video Laparoscope - wireless

SET-K-LA/VA1

Universal Laparo-/Vaginoscope SET, for all laparoscopic aproaches in small animals, for 1 & 2/3 portal technique and transvaginal laparoscopy

consisting of:

- LED Video Laparo. 0°/5mm/28cm (TA27-5)
- Working sheath 12mm (STV27-51)
- Safety trocar complete, 5,5mm (231-213V & 231-137V)
- Trocar disposable (TR-60-121)
- Veress needle, 10cm (L-19-100)
- Needle with mini grasping forceps (L-24-23)
- Grasping forceps, 5mm
- Metzenbaum scissors, 5mm
- Preparation forceps, 5mm
- CO2 Inflator, electronically monitored 20I (741-025V)
- 22" receiver/PC/recorder



Option: SET-K-LA/VA2

same as SET-K-LA/VA1 + HF vessel sealing, type Atom incl. sealing MIC instrument 5mm

